



Estimation of vertical exchange velocity through the sediment-water interface (Case study: Ziarat River in Golestan province)

J. Khandoozi, A. A. Dehghani*, M. Meftah Halaghi, A. Zahiri, Kh. Ghorban

Gorgan University of Agricultural Sciences and Natural Resources

ABSTRACT: Precise estimation of water exchange between surface and subsurface flow in the hyporheic zone which is the habitat of microorganisms, is vital. The temperature can be used as a tracer for the estimation of water exchange through sediment-water interphase. In this study, an instrument was designed and constructed to make the measurement and recording of sediment temperature in the depth of the hyporheic zone possible. In this regard, measurements were made in the Ziarat River of Golestan Province by the aforementioned instrument, and vertical exchange velocity through the sediment-water interface was calculated using an extended conceptual model of heat transfer. For this purpose, in a 40 m interval of the river, 10 cross-sections were selected at 4 m intervals, and at each cross-section, the temperature of four different depths of the riverbed (just below the bed, 0.25, 0.50, 0.75 m) was recorded during July and December 2018. The results showed that in all seasons, there is a continuous vertical exchange through the sediment-water interface, which can be obtained from the difference of thermal potential between the surface and subsurface of the river flow. The average of vertical exchange velocity for July and December was 59.3 mm/day and 284.3 mm/day, respectively.

Review History:

Received: Dec. 07, 2019

Revised: Dec. 07, 2019

Accepted: Jan. 26, 2020

Available Online: Mar. 02, 2020

Keywords:

Groundwater

Surface Flow

Water Exchange

Temperature Gradient

Hyporheic Region.

1- Introduction

The hyporheic zone is an active ecotone that connects surface water and groundwater. The characteristics of this zone are determined by the hydrological [3], chemical and biological [1,2] processes. This area of the river can be considered as a shelter for microorganisms that have played an important role in purifying river surface water. In this zone, a part of the surface water enters the underneath part of the riverbed and reenters the surface water by passing the interference path [4]. The exact measurement of the interaction between surface and subsurface water can be effective for surface water quality management. There are many different methods to measure such an interaction through which the way based on the concentration of tracer injected to flow or bed sediment. Regarding the fact that the surface water temperature is less than under bed river water in cold seasons, by the interaction between surface and subsurface water in the hyporheic zone, the colder water enters the bed and after transferring the heat, the water temperature is balanced; thus, there will be the suitable condition for river creatures especially fishes. While in summer, there is a vice-versa process. Based on the studies, by measuring the temperature of the river bed at different depths and by using the temperature as the tracer, the interaction between surface and subsurface can be estimated.

The dynamic recognition of the water phenomenon in the hyporheic area regarding hydrological, chemical and biological processes are of importance [4,6]. Normally, this phenomenon is accompanied by heat transfer, solution, and suspended materials in the form of physical and chemical processes [5,7]. This is a basic fact that water movement can redistribute the distribution of temperature under the bed surface [8,9]. The current interaction patterns can be derived from the number of temperature changes between surface and subsurface water [10]. The temperature can be easily measured by precise and cheap sensors which are accessible [8,11].

2- Material and Methods

In this study, an instrument has been designed and made in order to measure the temperature of the river bed at different depths in the Ziarat River. This instrument involves a metal pipe in which the end is sharp and two round metal boards. One board is used as the base to exit the water, and the other board to determine a place in the pipe tangent with river bed. The sharp end allows the pipe to enter the bed sediment very easily. There are four heat sensors that pass through the pipe and are connected to a temperature monitor. The measurement process was done in July and December 2018. For this purpose, in a 40 m interval of the river, 10 cross-sections

*Corresponding author's email: amirahmad.dehghani@yahoo.com



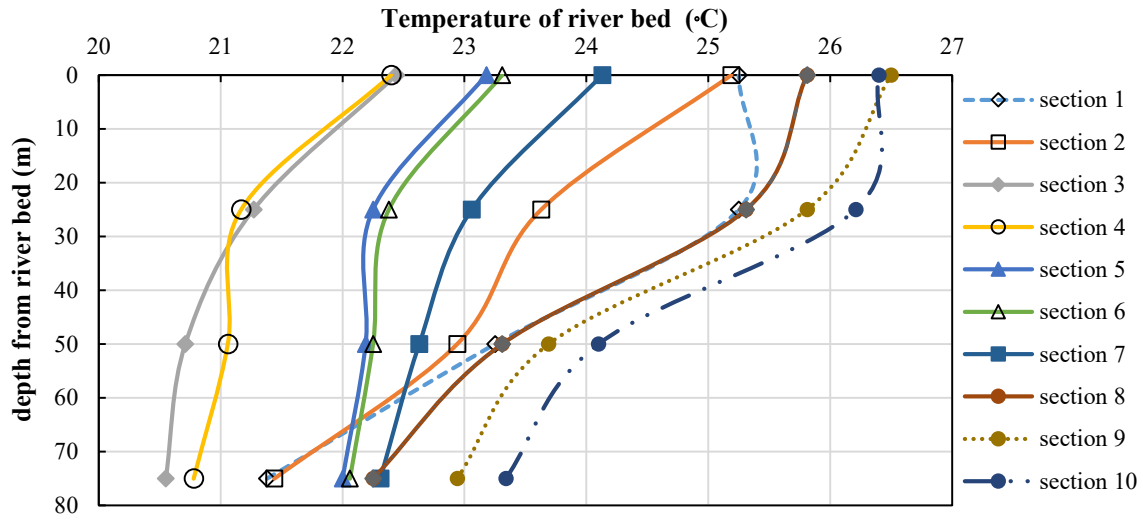


Fig. 1. Variation of temperature against depth from the river bed (July 2018)

were selected at 4 m intervals, and at each cross-section, the temperature of four different depths of the riverbed (just below the bed, 0.25, 0.50, 0.75 m) were recorded. During the measurement, the average depth of the water in July and December was 11.7 and 18.1 cm, respectively. The average flow velocity in July and December were also 0.2 and 0.35 m/s, respectively.

For assessing the exchange water between surface and subsurface flow across the river bed, the following heat transfer equation [12].

$$\frac{k}{\rho c} \frac{\partial^2 T(z)}{\partial z^2} - \frac{v \rho_0 c_0}{\rho c} \frac{dT(z)}{dz} = \frac{\partial T(z)}{\partial t} \quad (1)$$

Where v is the vertical exchange of flow, $T(z)$ is temperature, c is heat capacity of saturated sediment and k is thermal conductivity of the solid-fluid system ($J s^{-1} m^{-1} K^{-1}$) [13].

Assuming that for water is 42240) and k equals 1.756), the vertical exchange is obtained based on temperature-measured data.

$$\frac{\partial^2 T(z)}{\partial z^2} - \frac{v \rho_0 c_0}{k} \frac{dT(z)}{dz} = 0 \quad (2)$$

In equation (2), the amount of for water is 42240) and k equals 756/1). Then, by using equation (3), the rate of vertical exchange was calculated.

$$v = \left| \frac{k}{\rho_0 c_0 z} \ln \frac{T(z) - T_L}{T_0 - T_L} \right| \quad (3)$$

3- Results and Discussion

Figures 1 and 2 show variations of temperature in the depth of river bed sediment. It was found that in July, the temperature is decreased by increasing the depth. The results also showed that in December, the temperature is increased by increasing the depth. The average of vertical exchange velocity for July and December was 59.3 mm/day and 284.3 mm/day, respectively. By looking at the distribution of temperature, it was found that there is an inflection point that can be account as a measuring point of mixing the warmer and colder water.

The penetration of surface water into the porous media can be estimated if the position of this point is obtained. The position of this point from the river bed is obtained by regression analysis and presented as follows for December (Eq.4) and July (Eq.5):

$$Depth = 0.946H + 12.82WT + 48.3V + 12.54295T0 - 1.9TW - 140.07 \quad (4)$$

$$Depth = -0.55H + 7.8WT + 68V - 61.38156T0 + 58.8TW + 30.87698 \quad (5)$$

Where Depth= the inflection point, H= depth of water, WT= flow width, V= flow velocity, TW= surface water temperature.

4. CONCLUSION

In this study, vertical exchange velocity through the sediment-water interface is estimated based on measuring the temperature profile below the river bed. The measurements were done during July and December 2018. The results show that the average of vertical exchange velocity for July and December was 59.3 mm/day and 284.3 mm/day, respectively.

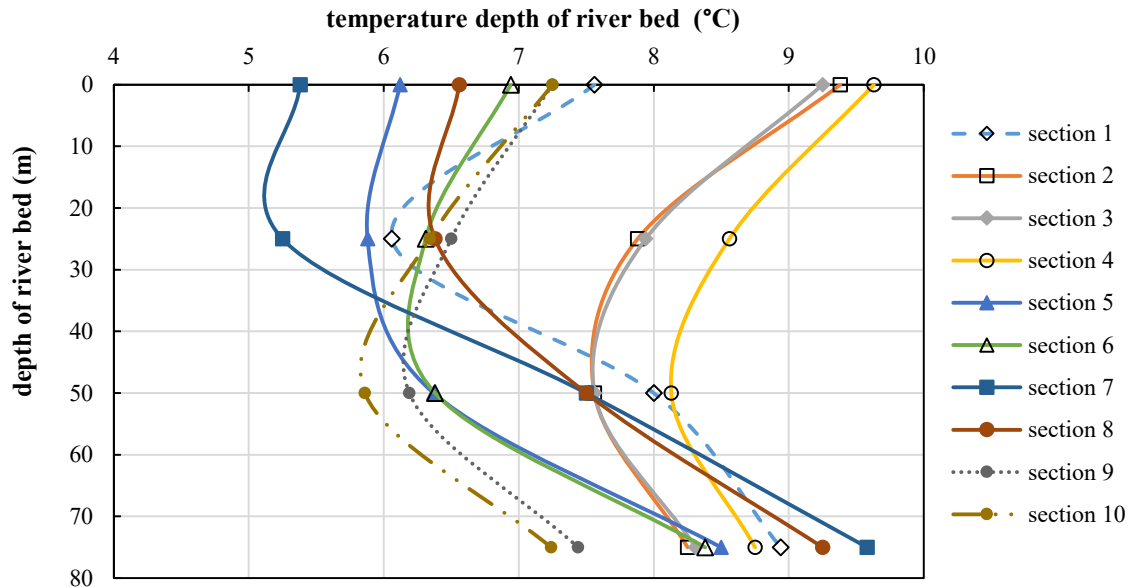


Fig. 2. Variation of temperature against of depth from the river bed (December 2018)

The results also show that the penetration depth of surface water into the porous media under the river bed can be estimated by correlating to readily available properties such as flow velocity, water depth, and surface water temperature.

References

- [1] J. Stanford, J. Ward, The hyporheic habitat of river ecosystems, *Nature*, 335(6185) (1988) 64.
- [2] P.J. Hancock, A.J. Boulton, W.F. Humphreys, Aquifers and hyporheic zones: towards an ecological understanding of groundwater, *Hydrogeology Journal*, 13(1) (2005) 98-111.
- [3] T.C. Bjornn, D.W. Reiser, Habitat requirements of salmonids in streams, *American Fisheries Society Special Publication*, 19(837) (1991) 138.
- [4] A. Argerich, E. Martí, F. Sabater, M. Ribot, Temporal variation of hydrological exchange and hyporheic biogeochemistry in a headwater stream during autumn, *Journal of the North American Benthological Society*, 30(3) (2011) 635-652.
- [5] M. Brunke, T. Gonser, The ecological significance of exchange processes between rivers and groundwater, *Freshwater biology*, 37(1) (1997) 1-33.
- [6] A.J. Boulton, S. Findlay, P. Marmonier, E.H. Stanley, H.M. Valett, The functional significance of the hyporheic zone in streams and rivers, *Annual Review of Ecology and Systematics*, 29(1) (1998) 59-81.
- [7] M. Mutz, A. Rohde, Processes of Surface-Subsurface Water Exchange in a Low Energy Sand-Bed Stream, *International Review of Hydrobiology*, 88(3-4) (2003) 290-303.
- [8] D.A. Stonestrom, K.W. Blasch, determining temperature and thermal properties for heat based studies of surface water groundwater interactions, (Cir1260) PY (2003).
- [9] D.A. Stonestrom, J. Constantz, Heat as a tool for studying the movement of ground water near streams, *US Dept. of the Interior, US Geological Survey*, 2003.
- [10] C.S. Lowry, J.F. Walker, R.J. Hunt, M.P. Anderson, Identifying spatial variability of groundwater discharge in a wetland stream using a distributed temperature sensor, *Water Resources Research*, 43(10) (2007).
- [11] M.P. Anderson, Heat as a ground water tracer, *Groundwater*, 43(6) (2005) 951-968.
- [12] M.L. Sorey, Measurement of vertical groundwater velocity from temperature profiles in wells, *Water Resources Research*, 7(4) (1971) 963-970.
- [13] D. Cheng, J. Song, W. Wang, G. Zhang, Influences of riverbed morphology on patterns and magnitudes of hyporheic water exchange within a natural river confluence, *Journal of hydrology*, 574 (2019) 75-84.

HOW TO CITE THIS ARTICLE

J. Khandoozi, A. A. Dehghani, M. Meftah Halaghi, A. Zahiri, Kh. Ghorbani, Estimation of vertical exchange velocity through the sediment-water interface (Case study: Ziarat River in Golestan province). *Amirkabir J. Civil Eng.*, 53 (6) (2021) 587-590

DOI: [10.22060/ceej.2020.17495.6579](https://doi.org/10.22060/ceej.2020.17495.6579)



