



## Site Selection of Construction Waste Landfill Based on Combination of Fuzzy AHP and Geospatial Information System (GIS) (Case Study: Qazvin, Iran)

M. Khademi Shiraz<sup>1\*</sup>, M. Ravanshadnia<sup>1</sup>, A. Khashand<sup>2</sup>, H. R. Abbasian<sup>2</sup>

<sup>1</sup> Department of Civil Engineering, Science and Research Branch, Islamic Azad University, Tehran, Iran.

<sup>2</sup> Faculty of Civil Engineering, K. N. Toosi University of Technology, Tehran, Iran

**ABSTRACT:** Today, with the increasing urban development, construction waste is a major problem for urban life. The city of Qazvin is no exception to this, and researching an optimum landfill site is an important necessity. The purpose of this research is to optimum site selection areas for landfill Construction wastes using the geospatial information system (GIS) in a boundary area of Qazvin County which taking into account the terms and conditions of organizations such as the Municipality, Waste Management, and Environmental Protection Organization. In this study, 16 layers of information including geology, soil type, and permeability, landuse, climate, river distance, distance from protected areas, aspect, etc. in the boundary of Qazvin County were used. After producing the preliminary maps, the sub-criteria of each information layer are classified and evaluated and the values are converted to fuzzy values between zero and one. Then, the fuzzy analytic hierarchy process (FAHP) method has been used to determine the absolute weight of each information layer and by integrating and overlapping weighted layers, a suitability map of the construction landfill site for Qazvin city is produced. According to the suitability map, sites for landfill were identified in five distinct zones, and fields with high area among fields of the fifth zone (with value 9) were suggested as the best landfill site for 40 years. The results showed that northwest of Qazvin due to good soil type, suitable landuse, distance from rivers, faults, and access to communication road and dry climate could be the most suitable site for landfill.

### Review History:

Received: Dec. 17, 2019

Revised: Mar. 01, 2020

Accepted: May. 09, 2020

Available Online: May. 28, 2020

### Keywords:

Geospatial information system (GIS)

Fuzzy analytic hierarchy process (FAHP)

Construction waste landfill

Site selection

Qazvin

## 1. INTRODUCTION

The uncontrolled growth of the population has led to the increasing development of the construction industry and, as a result, the production of construction landfill. In Iran, according to daily statistics, about 200 to 250 thousand tons that means 70 to 80 million tons of construction landfill are produced annually [1].

In this study, to find a suitable landfill construction site for Qazvin city some criteria such as geological information, soil science, topography, distance from population and industrial centers, distance from road lines, and appropriate landuse have been employed. Due to the involvement of different criteria, in this study, the geospatial information system (GIS) was used, which can combine information and produce results. How to combine data and make decisions in the geospatial information system is so important that using fuzzy logic and analytic hierarchy process (AHP) together, because of its highly efficient nature, can bring many benefits that were used in this article. In 1992, Hendrix and Buckley Evaluated the proper site selection of the landfill in Vermont, USA, in terms of physical and economic characteristics using GIS [2]. In 2002, Shrivastava and Nathawat explored the location of landfills around the city of Ranchi using GIS and RS, taking into account various natural and human criteria [3]. In 2017,

\*Corresponding author's email: fkhademishiraz@yahoo.com

Won and Cheng began to model building information to build and manage the discharge of trash and reduce it [4]. In 2017, Ghanei and Kashfi started to locate the landfill of construction waste in Yazd city using the analytic hierarchy process method. In this study, they chose optimal sites for landfill using parameters such as geology, soil science, landuse, and their composition in the GIS [5].

## 2. METHODOLOGY

The AHP method, which is based on the analysis of the human brain for complex problems, was proposed by a researcher named T. L. Saaty in the 1980s [6]. This technique is based on pairwise comparisons and allows researchers to study different scenarios.

The analytic hierarchy process involves 5 key steps:

1. Establishing hierarchical structure.
2. Establishing a pairwise comparison matrix.
3. Calculation of eigenvalue and eigenvector.
4. Perform compatibility tests and weight calculations.
5. The compatibility test examined whether the answers to the questionnaires are consistent or not.

However, the analytic hierarchy process method does not reflect accurately human reasoning and perception, because this method uses determined numbers in pairwise comparisons. Fuzzy logic can provide a mathematical



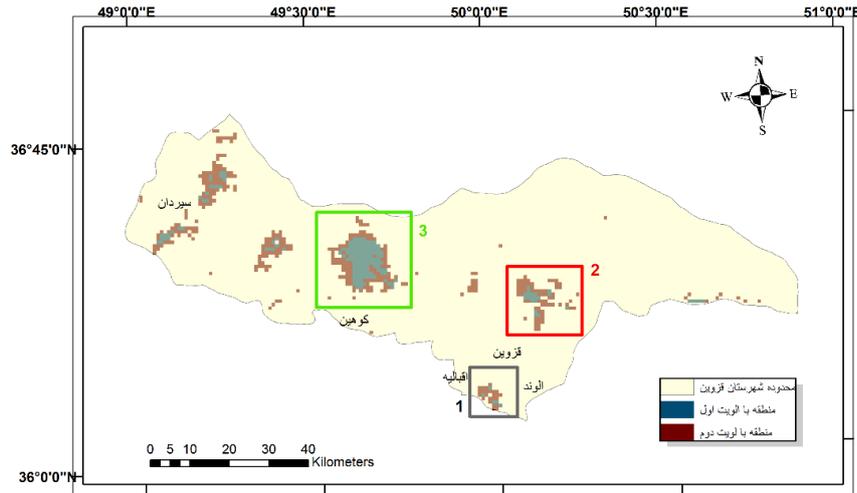


Fig. 1. Three suggested sites for burying construction landfill in Qazvin city

formulation of many concepts and systems that are inaccurate and ambiguous, and allow for reasoning and decision-making in conditions of uncertainty [7]. The model of membership function of fuzzy logic helps to scrutinize uncertainty and fuzziness in a way comparable to the human language. The phases of the fuzzy analytic hierarchy process method as “Chang’s method” are illustrated below [8]:

Phase 1. Establish a hierarchical structure;

Phase 2. Define fuzzy numbers to pairwise comparisons;

Phase 3. Establish a pairwise comparison matrix ( $\tilde{A}$ ) using fuzzy numbers;

$$\tilde{A} = [\tilde{a}_{ij}] \quad (1)$$

Where  $a_{ij} = (l_{ij}, m_{ij}, u_{ij})$ ,  $l_{ij}$ ,  $m_{ij}$  and  $u_{ij}$  represent lower limit, peak, and upper limit of triangular fuzzy numbers.

### 3. RESULTS AND DISCUSSION

The general process of locating can be described in three main steps. The first step is to process and extract the effective parameters and factors in site selecting construction landfills. In the second step, the generated layers or maps are classified using the GIS tool and assign Saaty scale 1, 3, 5, 7, and 9 (from low level to high level) to classes according to the rules and conditions, and then the evaluated values are fuzzified. In the third step, the weights of layers or factors that are effective in site selection are determined by the fuzzy analytic hierarchy process. By applying weights to the fuzzified layers and overlapping weighted layers, a suitability map of the construction landfill is produced. In this study, after preparing the suitability map, it is classified into 10 classes, that every two classes represent a single zone. Zone 5 is perfect (by the value of 9) to bury the construction landfill. The main reason for being a completely suitable zone (by the value of 9) can be listed as follow: 1) reasonable distance from fault points 2) reasonable distance from rivers and protected areas 3) landuse type of poor and relatively poor

rangeland lands 4) and dry climate. Also, the main reason for the inadequacy of completely

The main reason for being a completely unsuitable zone (by the value of 1) can be listed as follow: 1) short or so long-distance from city area 2) a short distance from fault points 3) agricultural and forestry landuse 4) less distance from rivers and having humid climate. As can be seen in Fig. 1, zone 5 with a value of 9 is masked from the other areas and zone 5 itself is divided into two regions with the first and second priority that has 140 and 303 square kilometers, respectively. Due to the dispersion proper area, three sites are proposed to bury construction landfill. In selecting the proposed sites, parts of zone 5 were selected that were close to Qazvin city.

### 4. CONCLUSION

A series of layers were processed using ArcGIS software for site selecting of construction landfill. Shapefile layers (point, linear, and polygon layers) and digital elevation model (DEM) as raster layers were called to the software to extract height, slope, and aspect. Then, after applying the Saaty scale to layers, they were fuzzified. To calculate the weight of the layers using the FAHP method, Excel software was used and the calculated weights have made an effect on the final overlapped layer. Determining the prioritization of layers relative to each other is very important in the FAHP method. Based on the results of the present study, it was found that 29% of the city of Qazvin has a suitable or ideal condition for burying landfill. After the production of a suitability map for site selecting and Qazvin city is divided into 5 zone areas then, zone 5 (class 9th and 10th, which have a high level in Saaty scaling), which is completely suitable, was selected for the burial place of construction landfill. The three proposed sites from zone 5, which were located near Qazvin city, were selected to have a value of 9 and a suitable distance from the cities (Alvand, Eghbaliyeh, and Qazvin) and the villages. The third proposed site with the relative average of higher values rather than the other two sites is the priority.

## REFERENCES

- [1] K. Khodaverdi, A. Faghih, E. Eslami, A fuzzy analytic network process approach to evaluate concrete waste management options, Tehran: Sharif University of Technology, (2008).
- [2] W.G. Hendrix, D.J. Buckley, Use of a geographic information system for selection of sites for land application of sewage waste, Journal of Soil and Water Conservation, 47(3) (1992) 271-275.
- [3] U. Shrivastava, M. Nathawat, Selection of potential waste disposal sites around Ranchi urban complex using remote sensing and GIS techniques, urban planning, in: Map Asia Conference, 2003, pp. 13.
- [4] J. Won, J.C. Cheng, Identifying potential opportunities of building information modeling for construction and demolition waste management and minimization, Automation in Construction, 79 (2017) 3-18.
- [5] J. Ghanei Ardakani, S.A. Kashfi, Landfill Location construction waste Yazd using Analytical Hierarchy Methods, Scientific Journal Management System, 11(39) (2017) 54-70. (In Persian).
- [6] T.L. Saaty, What Is The Analytic Hierarchy Process? In: Mathematical Models for Decision Support, Springer, 1988, Pp. 109-121.
- [7] A. Pourahmad, M. Sajad Zahrai, S. Nazari Alavi, K. Habibi, The Use Of Fuzzy Algorithms And GIS Equipment To Locate In Urban Areas (Case Study: City Landfill Babolsar), J Environ Stud, 33(42) (2007) 31-42.
- [8] D.-Y. Chang, Applications of the Extent Analysis Method on Fuzzy AHP, European Journal of Operational Research, 95(3) (1996) 649-655.

### HOW TO CITE THIS ARTICLE

M. Khademi Shiraz, M. Ravanshadnia, A. Khashand, H.R. Abbasian, Site Selection of Construction Waste Landfill Based on Combination of Fuzzy AHP and Geospatial Information System (GIS), Amirkabir J. Civil Eng., 53(7) (2021) 637-640.

DOI: [10.22060/ceej.2020.17555.6599](https://doi.org/10.22060/ceej.2020.17555.6599)



