

Evaluation of Fragility Curves of Asymmetric-Plan Reinforced Concrete Structures in the Near-Fault Earthquakes under the Effect of Torsion Considering Soil-Structure Interaction

M. S. Birzhandi*

Department of Civil Engineering, Isfahan (Khorasgan) Branch, Islamic Azad University, Isfahan, Iran.

Review History:

Received: May, 15, 2020
Revised: Jul. 23, 2020
Accepted: Jul. 24, 2020
Available Online: Aug. 25, 2020

Keywords:

Plan-asymmetric structures
Soil-structure interaction (SSI)
Life safety
Immediate occupancy
Near-fault pulse-like earthquakes.

ABSTRACT: In this study, the life safety and immediate occupancy of asymmetric-plan reinforced concrete dual structures under the simultaneous effect of torsion and soil-structure interaction in the near-fault pulse-like earthquakes were evaluated using a probabilistic framework. An 8-story R/C dual lateral load resistant building consisting of shear walls and moment-resisting frames was used. The sub-structure method was used to simulate the SSI effect. The impedance functions were calculated with the Novak semi-analytical method (DYNA5 software). The structure was modeled in the CANNY software considering the nonlinear behavior to perform the nonlinear time history analysis. All of the ground motion records were selected from the near-fault pulse-like records. Incremental dynamic analysis was employed to extract and fragility curves. To determine the life safety and immediate occupancy limit states, the strain of steel and concrete (as a micro index) were used rather than the usual macro indexes such as story drifts that lead to increase the accuracy of results. One of the most important of the conclusion is that neglecting the SSI effect in the life safety and immediate occupancy limit states for the plan-asymmetric structure is not in the safe side and lead to overestimation in the structural capacity. Also, an increase in the mass eccentricity leads to a decrease in the base conditions' importance and SSI effect. Another considerable observation is that an increase in the shear wave velocity of soil can lead to a decrease in the torsional response and the seismic response of asymmetric structure approaches to the symmetric one.

1- Introduction

Real structures are not usually plan-symmetric and fixed base; therefore, the torsion and the soil-structure interaction are two inevitable phenomena that must be considered in the seismic evaluation of structures. In the past studies [1, 2], these two effects were investigated separately, but in this paper, a probabilistic assessment of torsional effects and soil-structure interaction are targeted simultaneously. In this study, the life safety and immediate occupancy of asymmetric-plan reinforced concrete dual structures under the simultaneous effect of torsion and soil-structure interaction (SSI) in the near-fault pulse-like earthquakes were evaluated using a probabilistic framework.

2- Methodology

An 8-story R/C dual lateral load resistant building consisting of shear walls and moment-resisting frames was used. The plan of this asymmetric structure is shown in Fig. 1.

The sub-structure method was used to simulate the SSI effect. The impedance functions were calculated with the Novak semi-analytical method (DYNA5 software) [3]. The structure was modeled in the CANNY software [4]

considering the nonlinear behavior to perform the nonlinear time-history analysis. For the beams, the moment-curvature model is used at the ends to model the plasticity of beams. For the columns and shear walls because of the presence of axial forces and bi-axial bending moments, the fiber model (multi-spring model) that incorporates the axial forces and bi-axial bending moments is employed.

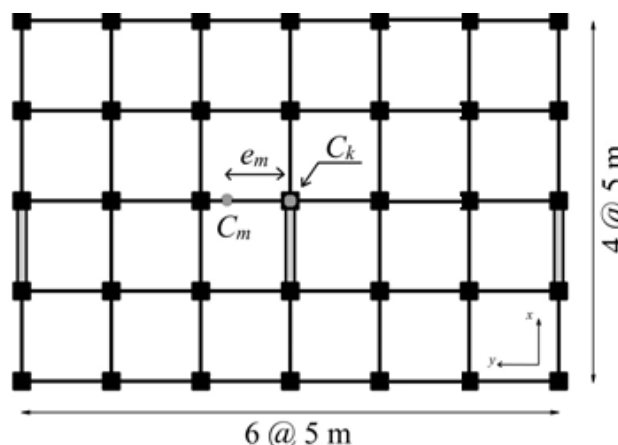


Fig. 1. Plan of the asymmetric structure [1].

*Corresponding author's email: s.birzhandi@khuisf.ac.ir

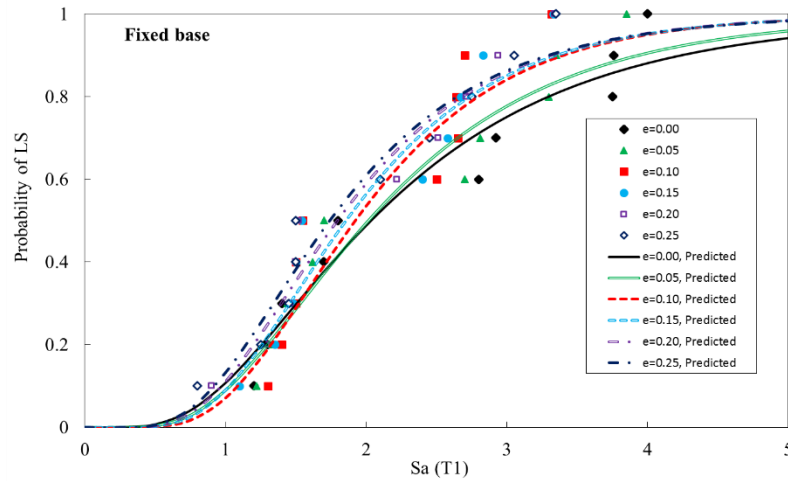


Fig. 2. An example of a figure fragility curves of the fixed base structure for the LS limit state.

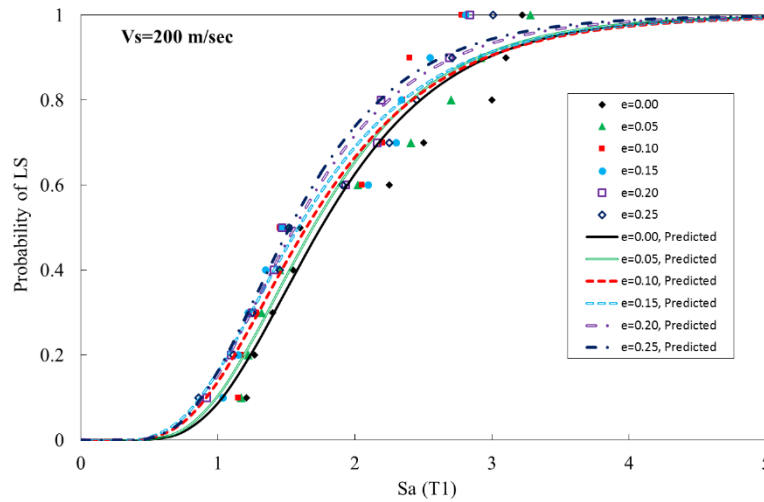


Fig. 3. Fragility curves of the flexible base structure ($V_s=200$ m/s) for the LS limit state.

All of the ground motion records were selected from the near-fault pulse-like records. Considering the fact (previous studies showed) that for T_p/T_1 ratio (T_p is the period of the largest velocity pulse and T_1 is the fundamental natural period of the structure) greater than two, an increase in T_p does not significantly affect the probability of structural collapse and considering the periods of structures, 10 records have been selected. Other criteria that considered are: (1) the R_{rup} (the closest distance to co-seismic rupture) is less than 13 km; (2) Moment magnitude (M_w) is greater than 6.5; (3) To simulate the more realistic conditions of the soft soil for SSI effects, the site shear wave velocity ($V_{s,30}$) of the selected ground motions is limited to the 350 m/s (the $V_{s,30}$ is the average shear-wave velocity over a subsurface depth of 30 m).

Incremental dynamic analysis (IDA) was employed to extract and fragility curves. To determine the life safety and immediate occupancy limit states, the strain of steel and

concrete (as a micro index) were used rather than the usual macro indexes such as story drifts that lead to increase the accuracy of results. In this approach, for the immediate occupancy limit state, the steel strain and concrete strain were limited $\epsilon_{L,S}=0.015$ and $\epsilon_{L,C}=0.004$ accordingly. Also for the life safety limit state, the steel strain and concrete strain were limited to $\epsilon_{L,S}=0.6\epsilon_{su}$ and $\epsilon_{L,C}=0.018$ accordingly [5].

3- Results and Discussion

The fragility curves were extracted using intensity measure (IM) directly (IM-based) with the log-normal distribution assumption. The spectral pseudo-acceleration of the first model of the structure with 5% modal damping ($S_a(T_1, 5\%)$) is selected as Intensity Measure (IM). For example, two cases of fragility curves are shown in Figs. 2 and 3.

4- Conclusion

One of the most important of the conclusion is that neglecting the SSI effect in the life safety and immediate occupancy limit states for the plan-asymmetric structure is not in the safe side and lead to overestimation in the structural capacity. Also, an increase in the mass eccentricity leads to a decrease in the base conditions' importance and SSI effect. Another considerable observation is that an increase in the shear wave velocity of soil can lead to a decrease in the torsional response and the seismic response of asymmetric structure approaches to the symmetric one.

References

- [1] M. Halabian, M. S. Birzhandi, Inelastic response of bi-eccentric plan asymmetric RC buildings, Journal of Structures and Buildings, 167 (SB8) (2014) 469-485.
- [2] M. Nakhaei, M. A. Ghannad, The effect of soil-structure interaction on damage index of buildings, Engineering Structures, 30 (2008) 1491–1499.
- [3] M. Novak, M. Sheta, L. El-Hifnawy, H. El-Marsafawi, O. Ramadan, (1993) DYNA5: A Computer Program for Calculation of Foundation Response to Dynamic Loads. Geotechnical Research Center, The University of Western Ontario.
- [4] K. Li, CANNY, (2002), Technical Manual (Version CO2): 3-Dimensional Nonlinear Static/ Dynamic Computer Program.
- [5] M. J. N. Priestley, G. M. Calv, M. J. Kowalsky, Displacement-Based Seismic Design of Structures. Pavia: IUSS Press, 2007.

HOW TO CITE THIS ARTICLE

M. S. Birzhandi , *Evaluation of Fragility Curves of Asymmetric-Plan Reinforced Concrete Structures in the Near-Fault Earthquakes under the Effect of Torsion Considering Soil-Structure Interaction*, Amirkabir J. Civil Eng., 53(11) (2022) 1029-1032.

DOI: 10.22060/ceej.2020.18443.6874



