

Semi-active control of structures with MR and Orifice dampers subjected to underground blast-induced vibration

Amir Hossein ghaffari¹, Hosein Ghaffar Zadeh^{2*}

¹PhD candidate, Faculty of Civil Engineering, University of Tabriz

²Professor, Faculty of Civil Engineering, University of Tabriz

* ghaffar@tabrizu.ac.ir

ABSTRACT

Using the control tools is an efficient method to decreasing the responses of the structure under the external excitations. In this regard, this study investigates the performance of two structures equipped with MR dampers and Orifice dampers under the blast-induced vibration. In addition to stimulating the underground blast induced vibration (Due to the different nature of these loads), seismic excitation has also been used to evaluate the efficiency of these dampers. These dampers are semi-active devices, which change the output force of the damper by changing the input voltage and magnetic field of dampers. Also, in this paper, clipped-optimal algorithm was used. This algorithm can generate optimal damper force by changing the voltage at each time step based on the input forces. In this research, structural responses based on optimal and maximum voltage are considered. Also, Numerical results of structure are compared with LQR algorithm. LQR algorithm is considered as a criterion for reducing structural responses to the blast-induced vibration. The results indicate that the proposed method (the different locations and types of dampers) is efficient for decreasing the responses of structure.

Keywords: Shear building, MR damper, Orifice Damper, Clipped-Optimal Algorithm, Underground Blast

1.Introduction

In recent years, the importance of the using methods that leads to reduce the damage in the structures caused by earthquakes, blast excitations, ... have become more apparent. Blast excitation is one of the important loads that has a very high energy in short period of time. This type of excitations can cause much more damage in structures than an earthquake[1], [2].

There are many control strategies that can help to reduce destructive effects of different excitations. Semi-active control strategy is one of them that can be efficient. In this field, MR damper and Orifice damper are two types of dampers which has attracted a lot of attention in recent years. Also, the Clipped-optimal is used to find appropriate reduction in responses of buildings[3]–[5].

Some researchers considered the effects of the blast excitations on the buildings. Mondal et al[1] studied the responses of a structure equipped with base isolator under the blast excitation. Results of this study indicate that this strategy is highly effective in decreasing of responses of structure. Also Chakraborty and Chaudhuri[2] studied the responses of a three-story structure under the blast

excitations by using the active control strategy. Due to the higher energy consumption of this method compared to other methods, this strategy has reduced the responses of the structure.

In this study, the performance of the two types of dampers under the blast excitation has been investigated. Blast excitation has been selected in this research due to its different nature compared to common earthquake excitations. For decreasing the destructive effects of this type of excitations and to find the optimum responses, MR damper and Orifice damper are located on different floors. Also, in order to achieve the efficient control force, the clipped-optimal strategy is used.

2. Methodology

In this study, two structures by using two types of semi-active dampers are used. MR damper and Orifice damper are located on different floors in order to achieve optimal responses. MR damper modeled by using modified bouc-wen. The main control strategy of this research is clipped-optimal. In the clipped-optimal control strategy, the voltage applied to MR damper and Orifice damper is increased to the maximum level, When the desired optimal force is bigger than produced force and the two forces are the same sign. Otherwise, the voltage applied is set to zero. This control strategy obtains the optimum control force by using LQG control algorithm (figure 1). Also, the maximum voltage strategy is used.

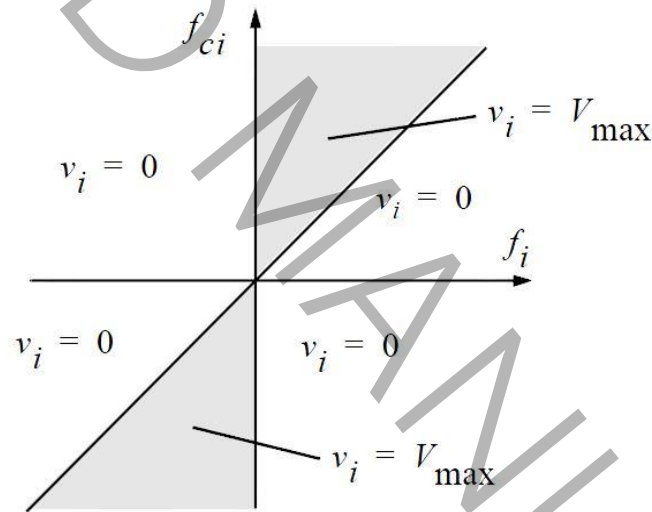


Figure 1 Diagram of applied voltage [6]

In order to investigate the effectiveness of this control strategy, two shear structures are chosen. In other words, the three-story building and five-story building are considered. The dampers in the three-story building are placed in two cases. In the first place, the damper is located only on the first floor and in the second place, in order to appropriate reduction of the responses of the structure under the two kinds of excitations, the dampers are placed in all the floors. Also, in the five-story building, three cases are investigated. In this building, dampers are located on two first floors, two last floors and all floors.

Blast excitation is modeled by assuming the 10 tons of TNT and 50 meters from the structure. This type of loading is considered for finding the critical responses of structures. This excitation is modeled as follows:

$$\ddot{x}_g(t) = -(1/t_d)\bar{x}_g \exp(-t/t_d) \quad (1)$$

In this equation, acceleration of blast excitation is modeled based on the characteristics of soil, distance and amount of TNT. The considered parameters for modeling the blast excitation are presented in Table 1. In this table C_p is assumed 5280 m/sec based on the existing soil. Also, an earthquake record is chosen to better comparison of responses.

Table 1 parameters of the blast excitation

R(m)	C_p (m / sec)	PPV (\bar{x}_g)(m / sec)	\ddot{x}_g (m / sec ²)
50	5280	0.2266	23.928

3. Results and Discussion

Based on the chosen structures and excitations, different kinds of arrangement of dampers are located on two structures. In other words, five types of arrangement are examined. Based on the responses of structures, the semi-active method cannot decrease all responses of structures, but this control strategy can lead to optimum responses by using the dampers in all floors of two structures. The acceleration of the fifth floor of the structure under the blast excitation can show the effectiveness of chosen strategy (figure 1).

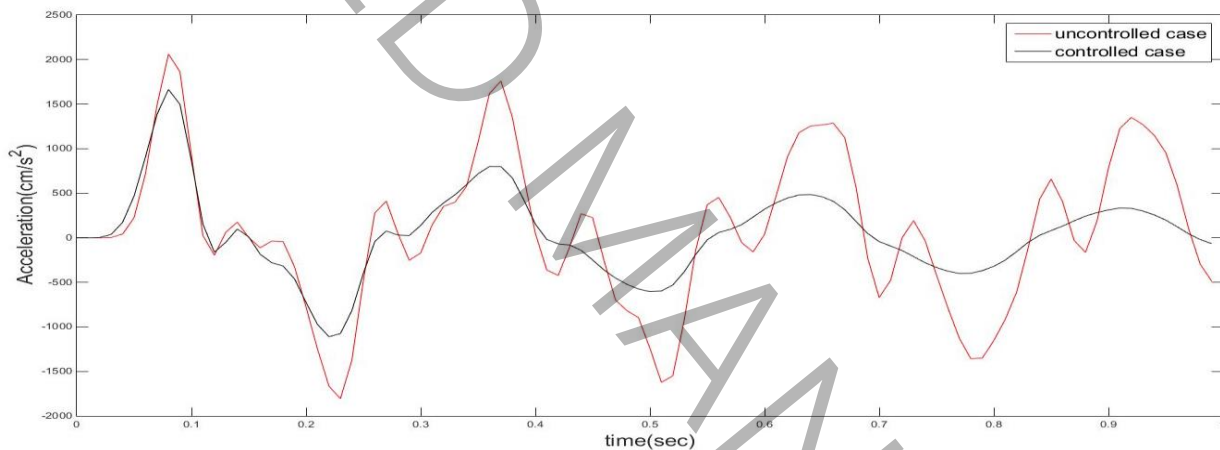


Figure 2 Acceleration responses of fifth floor of structure under the blast excitation by using MR damper in two first floors

But using the damper in first floor of the three-story building and using two dampers in five-story building are not effective in some responses of structure. These responses are expected due to the different nature of blast excitation rather than earthquake excitation. Of course, in all cases, the structures have experienced a suitable reduction under the excitation.

4. Conclusion

In this research, the responses of two buildings under the blast excitation are considered. In order to reduce the responses of structures, MR damper and Orifice damper are used. For finding the control force of these dampers, the clipped-optimal control strategy is used. Also, the maximum voltage strategy is utilized. In addition to the blast excitation, the earthquake excitation is used. According to the investigation of 5 cases of placement of dampers in two structures, in the cases where the dampers are not placed on all floors, the responses of structures have not decreased in most floors. Of course, when the dampers are located on all floors, all responses of the blast excitation have been properly reduced.

References

- [1] P. D. Mondal, A. D. Ghosh, S. Chakraborty, Performance of N-Z Base Isolation System for Structures Subject to Underground Blast, Proceedings of the International Symposium on Engineering under Uncertainty: Safety Assessment and Management (2013)1007-1020.
- [2] S. Chakraborty, S. Ray-chaudhuri, Control of Blast-Induced Vibration of Building by Pole Placement and LQG Control Algorithm, Advances in Structural Engineering (2015)381-391.
- [3] M. Bitaraf, O. E. Ozbulut, S. Hurlebaus, L. Barroso, Application of semi-active control strategies for seismic protection of buildings with MR dampers, Engineering Structures, 32(10) (2010), 3040–3047.
- [4] A. Younespour, H. Ghaffarzadeh, Semi-active control of seismically excited structures with variable orifice damper using block pulse functions, Smart Structures and Systems, 18(6) (2016)1111–1123.
- [5] D. K. Pandey, S. K. Mishra, Moving orifice circular liquid column damper for controlling torsionally coupled vibration, Journal of Fluids and Structures, 82 (2018) 357–374.
- [6] O. Yoshida, S. J. Dyke, Seismic Control of a Nonlinear Benchmark Building Using Smart Dampers, Journal of Engineering Mechanics, 130(4) (2004) 386–392.