

Dynamic analysis of earth dams under de-noised earthquake records

Fatemeh Nasiri¹, Hamed Javdanian^{2*}, Ali Heidari³

¹ M.Sc. Student, Department of Civil Engineering, Shahrekord University, Shahrekord, Iran

² Assistant Professor, Department of Civil Engineering, Shahrekord University, Shahrekord, Iran.

³ Associate Professor, Department of Civil Engineering, Shahrekord University, Shahrekord, Iran.

ABSTRACT

In this study, dynamic behavior of earth dams with clay core was analyzed using finite element method. The seismic responses of earth dams under main and wavelet-based decomposed earthquake records were investigated. Earthquake records were decomposed up to five stages by using wavelet de-noising method. The ratio of acceleration response spectrum to maximum acceleration, ratio of velocity response spectrum to maximum velocity, ratio of displacement response spectrum to maximum displacement, Fourier amplitude spectrum and time history of Arias intensity of earth dam crest under main and wavelet-based decomposed earthquake records were analyzed. The results demonstrate that the acceleration response spectrum ratio of dam crest under de-noised records up to 3rd level and the velocity and displacement spectrum ratios of dam crest up to 4th level has an acceptable accuracy in comparison to the responses under main earthquake records. Results of dynamic analysis indicate that Fourier Amplitude Spectra and Arias intensity of earth dam crest under de-noising based records up to 4th level are compatible with main earthquake records. The results indicate that the wavelet-based decomposed earthquake records can be a reliable alternative for main earthquake records in dynamic analysis of earth dams.

KEYWORDS

Earth dam, Dynamic analysis, Wavelet theory, De-noising method, Numerical modeling.

* Corresponding Author: Email: javdanian@sku.ac.ir

1. Introduction

Evaluating dynamic behavior of earth dams under earthquake loading has a great importance. Some researchers have argued that there are various methods in order to dynamic analysis of earth dams [1-3]. The effects of dam reservoir interactions and valley geometry on the seismic response of the La Villita embankment dam was investigated by Pelecanos et al. [4]. Some experiments, such as shaking table [5] and centrifuge [6] were used to examined the seismic behavior of earth dams. The results of study on the dynamic behavior of concrete faced rockfill dam (CFRD) that provided by Xu et al. [7], revealed that acceleration response and seismic-induced deformations are influenced by rockfill characteristics. Seismic deformations and settlements of embankment dams has been extensively studied by some researchers [8-11]. Wavelet transform (WT) is one the powerful method to analysis of signals. In this study the seismic response analysis of earth dam under two types of earthquake loading was investigated. The earthquake loading includes main and decomposed records. The decomposed records were obtained from de-noising method based on the wavelet theory. The ratio of acceleration response spectrum to maximum acceleration, ratio of velocity response spectrum to maximum velocity, ratio of displacement response spectrum to maximum displacement, Fourier amplitude spectrum and time history of Arias intensity of earth dam crest were explored.

2. Methodology

One of the powerful mathematical tools that used in signal processing is wavelet transform (WT). Wavelet theory has been widely used in civil engineering such as Process of earthquake records [12]. There are two types of wavelet transform such as discrete wavelet transform (DWT) and continuous wavelet transform (CWT). In the de-noising method (DNM), the main earthquake divided into low and high frequencies without downsampling.

The seismic response analysis of earth dam under the main and decomposed earthquake records is performed using Plaxis program. For this purpose, the acceleration time history of 8 earthquake records with different magnitudes was selected as the main records. It is shown in table 1.

Table 1. Earthquakes used in dynamic analysis

Number	Earthquake	Year	M_w
1	Abhar	2002	6.4
2	Imperial Valley	1979	6.5
3	Rudsar	2004	6.4
4	San Fernando	1971	6.6
5	Kobe	1995	6.9
6	Kocaeli	1999	7.6
7	Loma Prieta	1989	6.9
8	Hollister	1961	5.5

To decomposition, first the earthquake records were decomposed up to 5 stages by utilizing de-noising method (DNM) based on the wavelet. Two type mentioned records (main and decomposed records) were applied as input ground motions to the earth dam model. In the numerical modeling, the elastoplastic constitutive Mohr–Coulomb was utilized for describing the soil behavior of core and shell and the linear elastic model was used for dam foundation.

3. Results and Discussion

The ratio of acceleration response spectrum to maximum acceleration (S_a/a_{max}) presented in Fig 1. As seen in this figure, the S_a/a_{max} based on the de-noising method up to the 3rd level is a great compatible with the S_a/a_{max} under the main earthquake record.

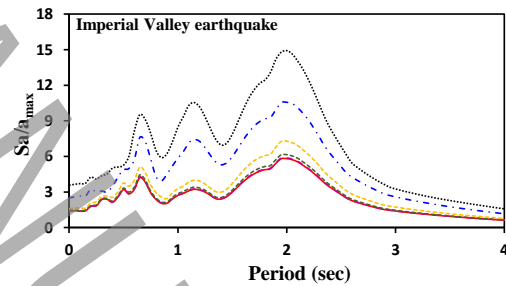


Figure 1. Ratio of acceleration response spectrum

Figs. 2 and 3 respectively show that the ratio of velocity response spectrum to maximum velocity (S_v/v_{max}) and ratio of displacement response spectrum to maximum displacement (S_d/d_{max}) have an acceptable accuracy up to the 4th level decomposition.

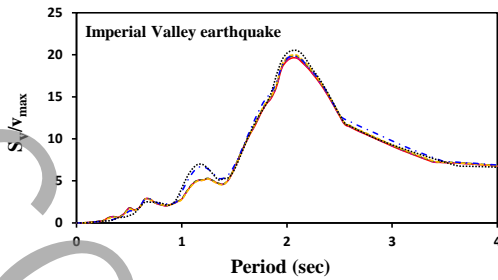


Figure 2. Ratio of velocity response spectrum

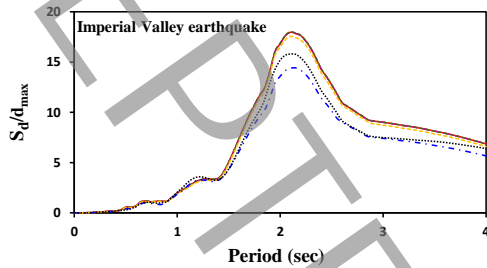


Figure 3. Ratio of displacement response spectrum

4. Conclusion

In this paper, the earth dam with the height of 50 m under the main and denoising-based records was analyzed seismically. The ratio of acceleration response spectrum to maximum acceleration (S_a/a_{max}), ratio of velocity response spectrum to maximum velocity (S_v/v_{max}), ratio of displacement response spectrum to maximum displacement (S_d/d_{max}), Fourier amplitude spectrum and time history of Arias intensity of earth dam crest was calculated. Comparisons indicate that the ratio of acceleration response spectrum to maximum acceleration (S_a/a_{max}) up to the 3rd levels of decomposed records is consistent with the results of the main records. Comparing the S_v/v_{max} , S_d/d_{max} and time history of Arias intensity obtained from dynamic analysis under de-noising decomposed earthquake records have an acceptable accuracy in comparison with those of the dam crest under main earthquake records up to the levels 4. Therefore, it can be concluded that the records based on the de-noising method can play the role of main earthquake records.

5. References

[1] G. Gazetas, P. Dakoulas, Seismic analysis and design of rockfill dams: state-of-the-art, *Soil Dynamics and Earthquake Engineering*, 11(1) (1992) 27-61.

[2] M. Rashidi, S.M. Haeri, Evaluation of behaviors of earth and rockfill dams during construction and initial impounding using instrumentation data and numerical modeling, *Journal of Rock Mechanics and Geotechnical Engineering*, 9(4) (2017) 709-725

[3] F. Nasiri, H. Javdani, A. Heidari, Behavior of earth dams due to downsampling-based records. In: 8th International Conference on Seismology and Earthquake Engineering (SEE8), 11 November, Tehran, Iran, (2019).

[4] L. Pelecanos, S. Kontoe, L. Zdravkovic, Dam-reservoir interaction effects on the elastic dynamic response of concrete and earth dams, *Soil Dynamics and Earthquake Engineering*, 82 (2016) 138-141.

[5] Y. Sawada, H. Nakazawa, T. Oda, S. Kobayashi, S. Shibuya, T. Kawabata, Seismic performance of small earth dams with sloping core zones and geosynthetic clay liners using full-scale shaking table tests, *Soils and foundations*, 58(3) (2018) 533-519.

[6] D. S. Park, N. R. Kim, Safety evaluation of cored rockfill dams under high seismicity using dynamic centrifuge modeling, *Soil Dynamics and Earthquake Engineering*, 97 (2017) 345-363.

[7] B. Xu, D. Zou, X. Kong, Z. Hu, Y. Zhou, Dynamic damage evaluation on the slabs of the concrete faced rockfill dam with the plastic-damage model, *Computers and Geotechnics*, 65 (2015) 258-265.

[8] H. Javdani, H. R. Zarif Sanayei, L. Shakarami, A regression-based approach to predict crest settlement of embankment dams under earthquake shaking, *Scientia Iranica*, 27 (2) (2020) 671-681.

[9] H. Javdani, L. Shakarami, H. R. Zarif Sanayei, modeling seismic settlement of earth dams due to earthquake loading, In: International Conference on New Findings of Civil, Architectural and Iran Building Industry, 11 December, Tehran, Iran, 2018.

[10] H. Javdani, B. Pradhan, Assessment of earthquake-induced slope deformation of earth dams using soft computing techniques, *Landslides*, 16(1) (2019) 91-103.

[11] H. Javdani, Predicting seismic slope displacements of embankment dams using fuzzy systems, *Journal of Dam and Hydroelectric Powerplant*, 5(19) (2019) 25-35.

[12] A Heidari, E. Salajegheh, Wavelet analysis for processing of earthquake records, *Asian Journal of Civil Engineering*, 9(5) (2008) 513-524.