

Effect of minor variations in characteristics of beam on the safety of 2D steel moment frame under dynamic loads

Ehsan Dehghani^{a*}, Zeinab Aryani^b

^a Assistant Professor, Qom University/Faculty of Engineering

^b Master's Student, Qom University/Faculty of Engineering

ABSTRACT

Increasing the strength of members or enhancing the redundancy does not jeopardize the overall safety of the structure. This can be proved under static loads by the safe theorem, which is one of the fundamental theories of plastic analysis. Although this theorem has not been proved in the case of dynamic loads, it has been widely applied to the design of systems under dynamic loads. Therefore, this paper aims to make use of the results of this theorem in numerical analysis of structures subjected to dynamic loads. Since the structural instability mechanism and collapse do not occur under transient loads, an adequate level of ductility demand has been assigned to the structural components to ensure the safety of the structure. For this purpose, the plastic rotation of the members is determined after a minor variation in strength and stiffness of the beams in a 2D five-story steel moment-frame structure by performing dynamic analysis. In order to compare the ductility demand obtained by the dynamic analysis with the criteria values, the performance of the structure is also evaluated by conducting nonlinear static analysis. The analysis results show that the increase in the strength of the beam members generally leads to a lower ductility demand; however, in some cases, the maximum ductility demand increases by about 7.3%. With the increase in the stiffness of the beams, the ductility demand increases by up to 16%. It can be concluded that with the increase in the stiffness and strength of the beams, a lower ductility demand is obtained by the dynamic analysis compared to the static analysis, and thus the structural collapse has not occurred under dynamic loads.

KEYWORDS

Safe theorem, nonlinear dynamic analysis, resistance, stiffness, ductility demand.

* Corresponding Author: Email: Dehghani@qom.ac.ir

1. Introduction

One of the most important issues in the field of seismic evaluation of structures is the difference in strength and stiffness of a part of the designed structure with those of the existing one. This difference is due to construction problems such as construction error, inaccuracy of the dimensions of the sections, lack of fixed or pinned supports, differences in material specifications, etc., which will cause changes in the expected responses and analysis results. However, this becomes important when these changes cause instability, changes in the mechanism of the structure or increase in the responses, including displacement and drift, beyond the allowable limit. This issue has been discussed for constant and specific static loads under the heading of plastic analysis fundamental theorems called safe and unsafe theorems. According to the safe theorem, if in a structure a set of bending moments can be found that satisfy both the equilibrium condition and the yield condition under the load coefficient λ , then λ is always less than or equal to the true collapse load coefficient [3]. From this theorem is concluded that if the considered sections have more strength or stiffness than the original design, the design will be safe. To prove these theorems, hypotheses have been considered that have limited their widespread application. These assumptions include static loading of the structure, a specific amount of loading, and sufficient ductility in the members. Therefore, under dynamic loading, as is the case with earthquake excitation, due to the variable nature of the load and its dynamic effects on the structure, the use of theorems may lead to unreliable results. However, in the common design of structures, the results of these theorems are used. In order to evaluate the reliability of the theorems, in this study, the application of these theorems in structures under the influence of earthquake excitation is investigated.

Various studies have been performed to investigate seismic behavior of structures with different properties. Most of these studies have examined changes in the number of floors, the number of bays or the type of lateral load-resisting system. Another group of studies has examined the effect of structural changes in detail. Previous studies have not been conducted to apply plastic theorems in evaluating the dynamic responses. For this purpose, changes in strength and stiffness of beam connections in a two-dimensional five-story steel moment-frame case study structure have been investigated. In order to perform nonlinear dynamic analysis in this research, 29 earthquake ground motion records have been used.

2. Methodology

As mentioned earlier, there are assumptions in the theorem adopted in this paper, such as the existence of sufficient ductility, which in reality it is not possible to make; As a result, local damage due to insufficient ductility in members is likely to occur. For this reason, to investigate the behavior of the modified structure, the ratio of the maximum ductility demand of the members in the modified structure is compared with that of the original structure.

3. Results and Discussion

In the following, in order to perform a numerical evaluation of the plastic theorem, the maximum rotation of members has been presented in two sections including change in strength and stiffness.

3-1. Graphs for change in strength of members

Figure 1 shows the average values of ductility demand with respect to the change in strength obtained by both the dynamic and the static analysis.

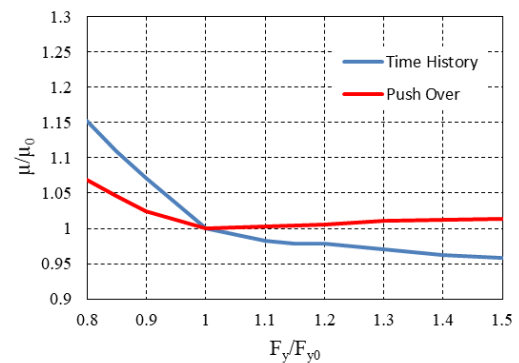


Figure 1: Average ductility demand values for different strength values under the nonlinear dynamic and static analysis.

As can be seen, with increasing strength, the ductility demand obtained by the static analysis is more than the corresponding value obtained by the nonlinear dynamic analysis. However, with decreasing strength, the opposite is true. Therefore, as mentioned earlier, it can be said that in general, in the existing models, with increasing ductility demand in the case of increased strength, the ductility of the proposed design will not exceed the allowable limit specified by the codes.

3-2. Graphs for change in stiffness of members

Figure 2 compares the average ductility demand with respect to the change in stiffness of members under both the static and dynamic analysis.

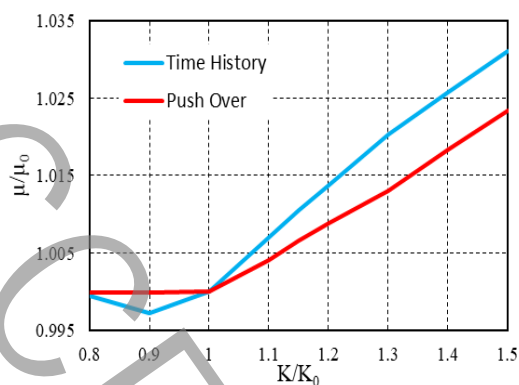


Figure 2: Average ductility demand values for different stiffness values under the nonlinear dynamic and static analysis.

With increasing stiffness, the average values of ductility demand obtained by static analysis are approximately equal to the corresponding value obtained by dynamic analysis. With decreasing stiffness, on the other hand, the ductility demand due to dynamic analysis has become more than nonlinear static analysis.

4. conclusion

In this research, a total number of 1160 analyzes have been performed on the two-dimensional moment-frame case study structure to investigate minor modifications in the strength and stiffness of the beam connections. Due to the nonlinearity of the analyzes and the absence of failure in the members, as well as the lack of significant change in the displacement of the roof of the structure, to evaluate the safety of the structure against collapse, the results of plastic rotation of hinges have been used. According to the analysis results, with a slight increase in the strength of the most critical joint in the beams, the ductility demand has generally decreased. In some cases, with a 50% increase in strength, the ductility demand has increased by a maximum of 7.3%. The rate of these changes is very low compared to the increase in strength.

The reason for the increasing ductility demand in a few special cases can be a change in the displacement pattern of the structure. Based on the results of nonlinear static analysis, the maximum increase in the ductility demand as a result of the increase in strength is about 17%. Comparing the results of dynamic analysis with nonlinear statics and considering the limits recommended by the codes, it can be said that with a slight increase in strength of the beams, the structure with a certain ductility capacity, can remain safe under the applied earthquake records. With the increase in the stiffness of the beams, the ductility demand generally increases. The amount of increase in the case of dynamic loads is up to 16% and in the case of static

loads is up to 22%. With increasing stiffness, the average ductility demand in the dynamic analysis is less than one percent higher than that obtained in the static analysis, and the amount of increase is generally small (about 3% with a 50% increase in stiffness). As a result, it can be concluded that with increasing stiffness of the structure, the ductility demand does not change greatly and it is below the ductility capacity of the structure, which is designed according to the provisions of the codes.

5. References

- [1] Drucker, D.C., Greenberg, H.J., Prager, W., 1951. in: J1. Appl. Mech.
- [2] Greenberg, H.J., Prager, W., 1951. Journ. Struct. Div., Prec. ASCE.
- [3] Baker, J., Baker, L., Heyman, J., 1980. Plastic design of frames 1 fundamentals, CUP Archive.
- [4] Aziminejad, A., Moghadam, A., 2007. "Effects of strength distribution on fragility curves of asymmetric single story building", *Proceedings of the Ninth Canadian Conference on Earthquake Engineering Ottawa*. Ontario, Canada.
- [5] Eshghi, S., Maki abadi, M., 2013., "Developing Theoretical Fragility Curves for Conventional Mid-rise Concrete Buildings in Iran", University of Science & Culture, tehran. (in Persian)
- [6] Mosleh, A., Rodrigues, H., Varum, H., Costa, A., 2016. Arêde, A., "Seismic behavior of RC building structures designed according to current codes", *Structures*. 7, 1-13.
- [7] Faisal, A., Majid, T.A., Hatzigeorgiou, G.D., 2013. "Investigation of story ductility demands of inelastic concrete frames subjected to repeated earthquakes", *Soil Dynamics and Earthquake Engineering*. 44, 42-53.
- [8] Samimifar, M., Oskouei, A.V., Rofooei, F.R., 2015. "Deflection amplification factor for estimating seismic lateral deformations of RC frames", *Earthquake Engineering and Engineering Vibration*. 14(2), 373-384.
- [9] Christidis, A.A., Dimitroudi, E.G., Hatzigeorgiou, G.D., Beskos, D.E., 2013. "Maximum seismic displacements evaluation of steel frames from their post-earthquake residual deformation", *Bulletin of Earthquake Engineering*. 11(6), 2233-2248.
- [10] Azhdarifar, M., Meshkat-Dini, A., 2015. "Study on the Seismic Response Parameters of Modular Tube Steel Mid-Rise Buildings under Effects of Near Field Ground Motions", *SID*. (in Persian)
- [11] Sivandi-Pour, A., Gerami, M., Taghdisi, M., 2019. "Assesment of the effect of column base connection rotational stiffness on seismic behavior of the steel moment frames", *Sharif journal of civil engineering*. 35.2, 2.1,83-92. (in Persian)
- [12] Stillmaker, K., Lao, X., Galasso, C., Kanvinde, A., 2017. "Column splice fracture effects on the seismic performance of steel moment frames",

Journal of Constructional Steel Research. 137 93-101.

- [13] Stillmaker, K., Magdaleno, A., Nazari, M., Kanvinde, A., 2018. "Assessment of column splice fracture influence on seismic performance of steel moment frames", *Eleventh U.S. National Conference on Earthquake Engineering.* 25-29.
- [14] Song, B., Galasso, C., Kanvinde, A., 2019. "Advancing fracture fragility assessment of pre-Northridge welded column splices", *Earthquake Engineering & Structural Dynamics.*
- [15] Instruction for Seismic Rehabilitation of Existing Buildings (No. 360), 2005. Management and Planning Organization Office of Deputy for Technical Affairs, tehran.