

Reliability-based Sensitivity Analysis of Shear Frame Equipped with Nonlinear Viscous Damper

Mohammadreza Seify Asghshahr¹

¹Department of Civil Engineering, Azarbaijan Shahid Madani University, Tabriz, Iran

ABSTRACT

Recently, nonlinear viscous dampers have been widely used to improve the seismic performance of structures. These dampers dissipate the kinetic energy caused by the earthquake by producing a damping force. These dampers are designed in such a way that the force is proportional to the velocity. The Maxwell model is the most common model for modeling the behavior of nonlinear viscous dampers. In this model, the damping coefficient, the velocity exponent and the axial stiffness of the dampers are the key parameters. In most previous studies, the uncertainty of the underlying parameters in behaviour of viscous dampers has been ignored while it can has a significant effect on the seismic response of structures. In this study, first, the reliability analysis of a shear frame equipped with a nonlinear viscous damper was performed using the Monte Carlo sampling method. The results show that increasing the maximum drift from 0.015 to 0.02 reduces the probability of failure by 72%. Then, reliability-based sensitivity analysis of the studied frame was performed in order to determine the most effective random variable on the reliability of the frame. The results show that the velocity exponent is the most effective random variable on the reliability of the frame. Also, results indicate that importance of random variables depends on the used limit state function in the reliability analysis. For example, the importance value of the damping coefficient is 59% and 9.5% less than the velocity exponent with respect to the maximum drift of 0.015 and 0.025, respectively.

KEYWORDS

Nonlinear Viscous Damper, Shear Frame, Reliability, Sensitivity Analysis, Monte Carlo Sampling.

1. Introduction

The safety of building structures and life safety of residents are the ultimate goal of designing structures under earthquakes. Structural control systems in earthquake engineering are used to protect structures against the destructive effects of earthquakes. In particular, the use of viscous dampers as a subset of passive control systems in buildings has increased significantly because these devices have the ability to reduce the structural response at a lower cost than other

methods [1, 2]. Viscous dampers have the advantage that the forces created in them are generally out of phase with the forces due to the internal displacement of the building frames under earthquake load [3]. Recent earthquakes have proven the effectiveness of viscous dampers in modifying the response of buildings to control damage to structural and non-structural members [4, 5].

The performance of building frames equipped with viscous dampers has been extensively studied. In

preliminary studies, a deterministic approach to this problem has been chosen and the uncertainty of the parameters involved in the behavior of structures equipped with viscous dampers has been ignored [6, 7]. However, due to the uncertainty in the seismic loads on the structure and also the characteristics of the structure equipped with viscous dampers, the use of a probabilistic approach to evaluate the performance of this type of structures is necessary and has been addressed in several studies [8-12].

In this research, sampling-based reliability sensitivity analysis [13] of structure equipped with nonlinear viscous damper has been performed, in order to identify random variables that have the greatest impact on the seismic reliability of the structure. Due to the deterioration of the nonlinear viscous damper during the structural service life [14], three parameters of damping coefficient, velocity exponent and axial stiffness have been considered as random variables in reliability analysis. Also, in order to better addressing the uncertainties in selected ground motion records, the conditional mean spectrum method [15] has been used.

2. Methodology

In this study, a one-story shear frame equipped with a non-linear viscous damper is considered as a case study (Figure 1). Characteristics of the non-linear viscous damper consisting of damping coefficient (C_d), axial stiffness (K_d), and velocity exponent (α) are considered as random variables. It is assumed that all of these random variables have a normal distribution with 10% coefficient of variation. The mean values of C_d , K_d , and α are $20.745 \text{ kN}\cdot(\text{s}/\text{mm})^{0.35}$, $25 \text{ kN}/\text{mm}$ and 0.35 , respectively.

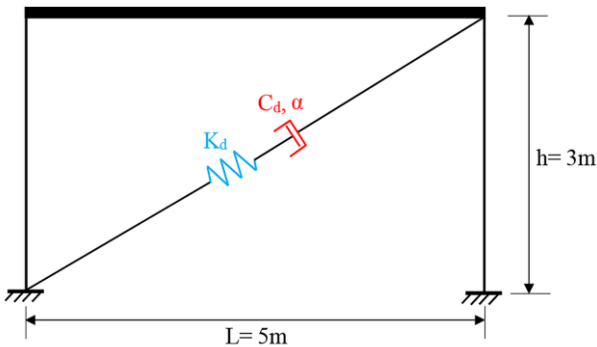


Figure 1. Studied shear frame

Using mean spectrum method [14], 10 ground motion records were selected from PEER database. The response spectra of selected records with median and 2.5 and 97.5 percentiles are shown in Figure 2.

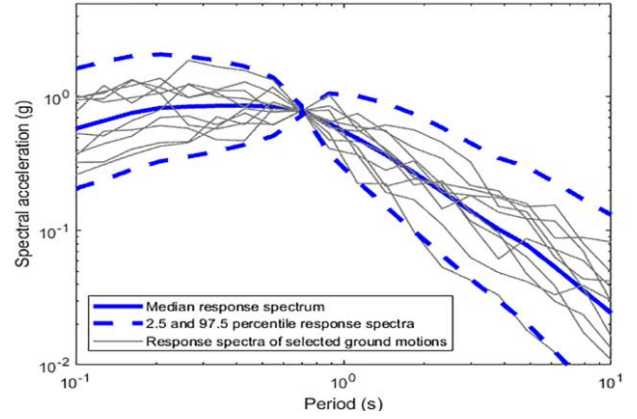


Figure 2. Response spectra of selected ground motions

The following limit state function is used in the reliability analysis:

$$g(\mathbf{x}) = \text{Drift}_{\max} - \text{Drift}(\mathbf{x}) \quad (1)$$

where $\text{Drift}(\mathbf{x})$ is the drift of the frame, \mathbf{x} is the vector of random variables and Drift_{\max} is the code-defined allowable drift (0.015, 0.02 and 0.025 for $g_1(\mathbf{x})$, $g_2(\mathbf{x})$ and $g_3(\mathbf{x})$, respectively).

3. Results

Results of reliability analysis using Monte Carlo sampling method are reported in Table 1. According to sampling-based reliability sensitivity analysis results, the obtained importance vectors δ and η of random variables with respect to different limit states are shown in Figures 3 and 4, respectively.

Table 1. Results of sampling analysis

Limit state function	Exceedance probability	Coefficient of variation
$g_1(\mathbf{x})$	0.5363	0.0199
$g_2(\mathbf{x})$	0.1517	0.0236
$g_3(\mathbf{x})$	0.000622	0.0486

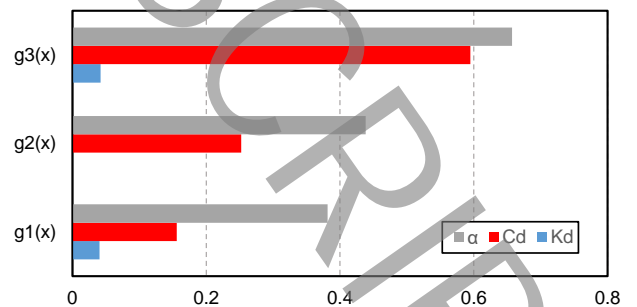


Figure 3. δ importance vector

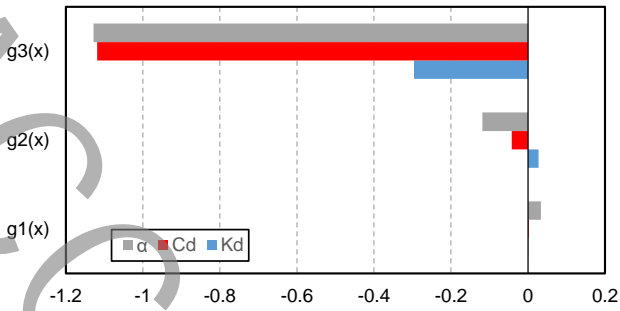


Figure 4. η importance vector

4. Conclusions

The obtained results of sampling-based reliability sensitivity analysis of the shear frame equipped with nonlinear viscous damper indicate that:

- Velocity exponent and axial stiffness are the most and least effective random variables on the seismic reliability of the frame, respectively.
- Importance of random variables depends on the used limit state function in the reliability analysis. For example, the importance value of the damping coefficient is 59% and 9.5% less than the velocity exponent with respect to the maximum drift of 0.015 and 0.025, respectively.
- All of the random variables (velocity exponent, axial stiffness, and damping coefficient) are the resistance parameters. So, increasing these parameters lead to increase in the seismic reliability of the studied shear frame.

5. References

- [1] C. Christopoulos, A. Filiatrault, Principles of supplemental damping and seismic isolation, IUSS Press: Milan, Italy, (2006).
- [2] I. Takewaki, Building control with passive dampers: optimal performance-based design for earthquakes, John Wiley & Sons: Asia, Singapore, (2011).
- [3] M.C. Constantinou, T.T. Soong, and G.F. Dargush, Passive energy dissipation systems for structural design and retrofit, Multidisciplinary Center for Earthquake Engineering Research, University of Buffalo, USA, (1998).
- [4] K. Kasai, A. Mita, H. Kitamura, K. Matsuda, T.A. Morgan, and A.W. Taylor, Performance of seismic protection technologies during the 2011 Tohoku-Oki Earthquake. *Earthquake Spectra*, 29(S1) (2013) 265-293.
- [5] E. Miranda, G. Mosqueda, R. Retamales, and G. Pekcan, Performance of nonstructural components during the 27 February 2010 Chile Earthquake, *Earthquake Spectra*, 28(S1) (2012) 453-471.
- [6] M.C. Constantinou, and M.D. Symans, Experimental study of seismic response of buildings with supplemental fluid dampers, *The Structural Design of Tall and Special Buildings*, 2(2) (1993) 93-132.
- [7] M. Martinez-Rodrigo, and M.L. Romero, An optimum retrofit strategy for moment resisting frames with nonlinear viscous dampers for seismic applications, *Engineering Structures*, 25 (2003) 913-925.
- [8] M.D. Di Paola, L.L. Mendola, and G. Navarra, Stochastic seismic analysis of structures with nonlinear viscous dampers, *Journal of Structural Engineering*, 133 (2007) 1475-1478.
- [9] E.M. Guneyisi, and G. Altay, Seismic fragility assessment of effectiveness of viscous dampers in R/C buildings under scenario earthquakes, *Structural Safety* 30 (2008) 461-480.
- [10] O. Lavan, and M. Avishur, Seismic behavior of viscously damped yielding frames under structural and damping uncertainties, *Bulletin of Earthquake Engineering*, 11 (2013) 2309-2332.
- [11] J.I. Colombo, and J.L. Almazan, Seismic reliability of continuously supported steel wine storage tanks retrofitted with energy dissipation devices, *Engineering Structures*, 98 (2015) 201-211.
- [12] A. Dall'Asta, E. Tubaldi, and L. Rangi, Influence of the nonlinear behavior of viscous dampers on the seismic demand hazard of building frames, *Earthquake Engineering and Structural Dynamics*, 45 (2016) 149-169.
- [13] H. Talebiyan, and M. Mahsuli, Sampling-Based reliability sensitivity analysis using direct differentiation, *ASCE-ASME Journal of Risk and Uncertainty in Engineering Systems, Part A: Civil Engineering*, 6(2) (2020) 04020015.
- [14] H. Ataei, and K. Kalbasi Anaraki, A proposed structural design method considering fluid viscous damper degradations, *The Structural Design of Tall and Special Buildings*, 27(15) (2018) e1512.
- [15] J.W. Baker, Conditional mean spectrum: Tool for ground-motion selection, *Journal of Structural Engineering*, 137(3) (2011) 322-331.